

ADDITIONAL EQUIPMENT TRANSFER / DISTRIBUTION / FILLING SYSTEMS


EXAMPLES: PRODUCT: CEREALS

Requirement: Filling the cereal compartment of a 2-compartment yoghurt pot, with interchangeable format

Rated fill weight: 12g to 20g

Performance:
 12-way format – 12 x 30 = 360 weighing operations per minute
 16-way format – 16 x 30 = 480 weighing operations per minute
 18-way format – 18 x 30 = 540 weighing operations per minute
 24-way format – 24 x 20 = 480 weighing operations per minute

Format:

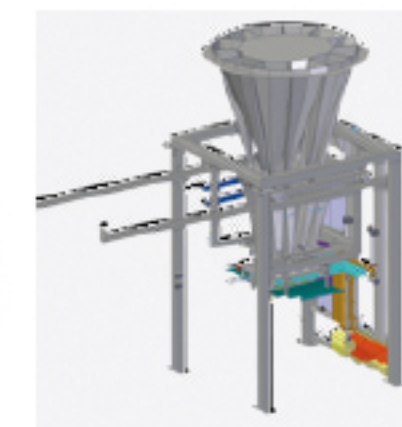


PRODUCT: SURIMI PIECES, VERY STICKY

Requirement: Filling of thermoformed trays, with interchangeable format (4x2, 3x2, 2x2, 1x2) and ejection of rejects

Rated fill weight: 113.4g to 2.265g

Performance: Up to 100 weighing operations per minute

Format:

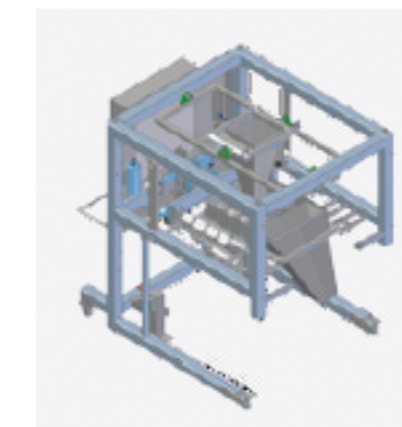

PRODUCT: FRESH, CUT, COOKED MEAT


(e.g. chicken, ham, turkey)

Requirement: Transfer to tray line, 2 tracks / 4 rows, with ejection of rejects

Rated fill weight: 198g to 226g

Performance: 2 x 80 weighing operations per minute

Format:

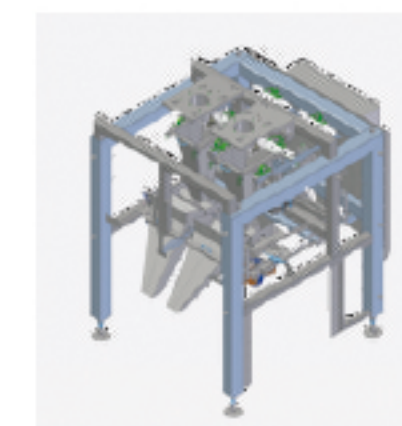

BENEFITS

- » Individual, tailor-made systems
- » Decades of experience – with more than 600 systems already built
- » Multi-flexible synchronization options for all standard packaging machines
- » MULTIPOND takes responsibility for everything from the weighing process to the packaging stage
- » Actuation from the weigher (no separate PLC required, both devices use a shared menu)
- » Hygienic design – all parts can be removed for cleaning without the need for tools
- » Suitable for direct integration with the packaging machine
- » Fast, tool-free format changes, 1 to 24-way formats possible
- » Portable or stationary
- » Safety devices
- » Individual adaptation of the software is possible
- » No contamination of sealing surfaces
- » Reliable supply of approved replacement parts
- » High quality thanks to MP standard